



**Teknofluor**



# ANTIVIBRANTI





I nostri **antivibranti** cilindrici sono composti da una parte in **gomma** e una in **metallo** e sono realizzati con una mescola a base di gomma naturale, colore nero e con durezza 55 Shore A. Le parti in metallo sono opportunamente trattate per garantire la **migliore resistenza** all'invecchiamento e alla corrosione. Per venire incontro alle diverse esigenze dei clienti, offriamo anche la possibilità di produzioni su richiesta in gomma naturale con durezza 45 e 70 Shore A, oppure con mescole sintetiche ad alta resistenza agli idrocarburi. Disponiamo di **varie misure** a catalogo e siamo in grado di produrre in **tempi brevi** per soddisfare richieste urgenti.



## MISURE DISPONIBILI

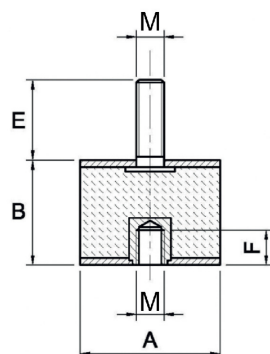

| COD.   | D   | H  | d   | l  | h    | Carico max<br>Max load<br>compr. da N |
|--------|-----|----|-----|----|------|---------------------------------------|
|        | mm  | mm | M   | mm | mm   |                                       |
| SS1515 | 15  | 15 | M4  | 4  | 10   | 15                                    |
| SS2015 | 20  | 15 | M6  | 5  | 13.5 | 34                                    |
| SS2020 | 20  | 20 | M6  | 5  | 13.5 | 34                                    |
| SS2025 | 20  | 25 | M6  | 5  | 13.5 | 24                                    |
| SS2520 | 25  | 20 | M6  | 5  | 18.5 | 45                                    |
| SS2525 | 25  | 25 | M6  | 5  | 18.5 | 40                                    |
| SS2530 | 25  | 30 | M6  | 5  | 18.5 | 34                                    |
| SS3020 | 30  | 20 | M8  | 6  | 23   | 66                                    |
| SS3030 | 30  | 30 | M8  | 6  | 23   | 61                                    |
| SS3040 | 30  | 40 | M8  | 6  | 23   | 55                                    |
| SS4030 | 40  | 30 | M8  | 7  | 28   | 98                                    |
| SS4040 | 40  | 40 | M8  | 7  | 28   | 107                                   |
| SS5030 | 50  | 30 | M10 | 8  | 28   | 158                                   |
| SS5040 | 50  | 40 | M10 | 8  | 28   | 143                                   |
| SS5050 | 50  | 50 | M10 | 8  | 28   | 133                                   |
| SS6030 | 60  | 30 | M10 | 8  | 34   | 172                                   |
| SS6040 | 60  | 40 | M10 | 8  | 34   | 169                                   |
| SS6050 | 60  | 50 | M10 | 8  | 34   | 199                                   |
| SS7540 | 75  | 40 | M12 | 10 | 38   | 377                                   |
| SS7550 | 75  | 50 | M12 | 10 | 38   | 372                                   |
| 10050  | 100 | 50 | M16 | 13 | 38   | 560                                   |
| 10060  | 100 | 60 | M16 | 13 | 38   | 587                                   |

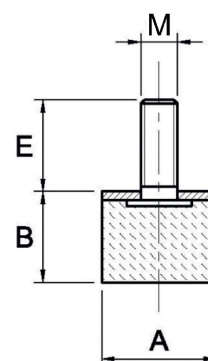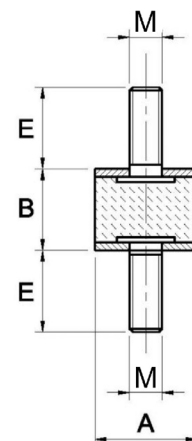

Our cylindrical vibration dampers are composed of a rubber and a metal part and are made with a natural rubber based compound, black color and hardness 55 Shore A. Metal parts are suitably treated to ensure the best resistance to aging and corrosion.

To meet the different needs of customers, we also offer the possibility of production on request in natural rubber with a hardness of 45 and 70 Shore A, or with synthetic compounds with high resistance to hydrocarbons. We have various sizes in our catalogue and are able to produce quickly to meet urgent requests.